



# ASEP-P

## SERIES



DUAL WEIGHING RANGE RETAIL SCALE





# ASEP

## COMMON FEATURES

- OIML/EC Type Approved Dual Weighing Range Price Computing Scale
- Automatic Shift Between Low and High Weighing Range with Indication on Display Panel
- 99 Unit Price PLUs, Including 5 X One Touch
- User Friendly Functions Include: - Memory Accumulation, Non-Weighed Article, Fixed Unit Price, Paid & Change, Manual Zero & Tare, Auto Power Saving, Power On & Zero Tracking
- 6 x User Selectable Output Baud Rate
- Bold Type Wide Angle LCD display
- Long Battery Operation Time: 120 Hours Plus
- Dual Power Source: - By Built-in Rechargeable Battery or Power Adaptor
- Stainless Steel Platter, Backlight, RS-232C interface, Built-in Rechargeable Battery, Power Adaptor, Bubble Level and Adjustable Feet Included
- Completed with Low Battery and Charging Status Indicators

## OPTION AVAILABLE


- Printer Interface Output

## SPECIFICATIONS

| Model No.    | Capacity<br>W <sub>1</sub> /W <sub>2</sub> (kg)   | Division<br>e <sub>1</sub> /e <sub>2</sub> (kg) | Platter                                            |
|--------------|---------------------------------------------------|-------------------------------------------------|----------------------------------------------------|
| ASEP-6       | 3/6                                               | 0.001/0.002                                     | 280x350mm with<br>Stainless Steel<br>Platter Cover |
| ASEP-15      | 6/15                                              | 0.002/0.005                                     |                                                    |
| ASEP-30      | 15/30                                             | 0.005/0.01                                      |                                                    |
| ASEP-60      | 30/60                                             | 0.01/0.02                                       |                                                    |
| ASEP-6P      | 3/6                                               | 0.001/0.002                                     |                                                    |
| ASEP-15P     | 6/15                                              | 0.002/0.005                                     |                                                    |
| ASEP-30P     | 15/30                                             | 0.005/0.01                                      |                                                    |
| ASEP-60P     | 30/60                                             | 0.01/0.02                                       |                                                    |
| Power Source | By Built-in Rechargeable Battery or Power Adaptor |                                                 |                                                    |
| Operation    | 0-40°C (32-104°F)                                 |                                                 |                                                    |
| Environment  | Non-condensed R.H. ≤85%                           |                                                 |                                                    |

\* Specifications subject to change without notice

ASEP-P

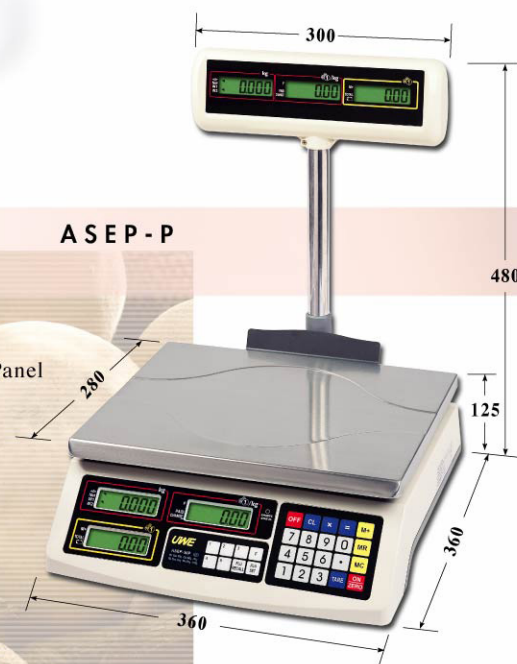

ASEP



unit = mm

## LOCAL DISTRIBUTOR INFORMATION



UNIVERSAL WEIGHT ENTERPRISE CO., LTD.  
http://www.uwe-scale.com.tw

May 2005 Designed by DAILY  
Printed in Taiwan