



- 3840 x 2160 4K resolution
- Infrared 10-point touch
- Embedded media player and 16GB storage
- Expandable external media player holder
- USB multimedia playback

The ViewSonic EP5540T is a 10-point interactive 55" all-in-one free-standing digital ePoster kiosk with a sleek, slim design. Great for grabbing attention in busy, high-traffic areas, the EP5540T comes with a scratch-proof tempered glass faceplate for added durability. Featuring 4K resolution, 178°/178° wide-angle viewing, and dual 10W stereo speakers, the EP5540T delivers customised multimedia messaging with vivid clarity. Photo and video files can be played back using the embedded Quad-core media player and 16GB of internal memory, or add your own media player using the convenient media player cradle inside the lockable security door. The signage content and display management software, as well as compatibility with ProAV control systems, make for easy management of multiple displays.

4K Resolution

This display features 4K resolution for unbelievable pixel-by-pixel image performance and a more realistic viewing experience.



Full HD

4K

Interactive On-Demand Messaging

This display delivers on-demand interactive messaging with 10-point multi-touch capability and is the perfect e-catalog display solution for use as retail, information, and wayfinding kiosks in high-traffic areas.



All-in-one with Integrated Media Player

This display features an integrated media player with quad-core processor and 16GB storage, providing smooth and reliable multimedia contents playback – without the need for an external media player or PC.



USB Multimedia Playback

Customised photos, music, and 4K video can be quickly displayed on-screen directly from a USB drive.



Access to Web Contents

Integrated with RJ45 connectivity, the display offers convenient web browsing functionality. Users can search online and watch videos directly on the display without having to connect to other computing devices.



Internal Scheduler

An efficient, user-friendly scheduling interface is available via the on-screen display (OSD). Setup features include time and date scheduling, ensuring that messaging, images, or videos run smoothly and on time.



ON
AM09:00




OFF
PM10:00



Dual 10W Speakers

Designed with dual integrated speakers, this display combines incredible screen performance with stereo sound for an immersive multimedia experience.

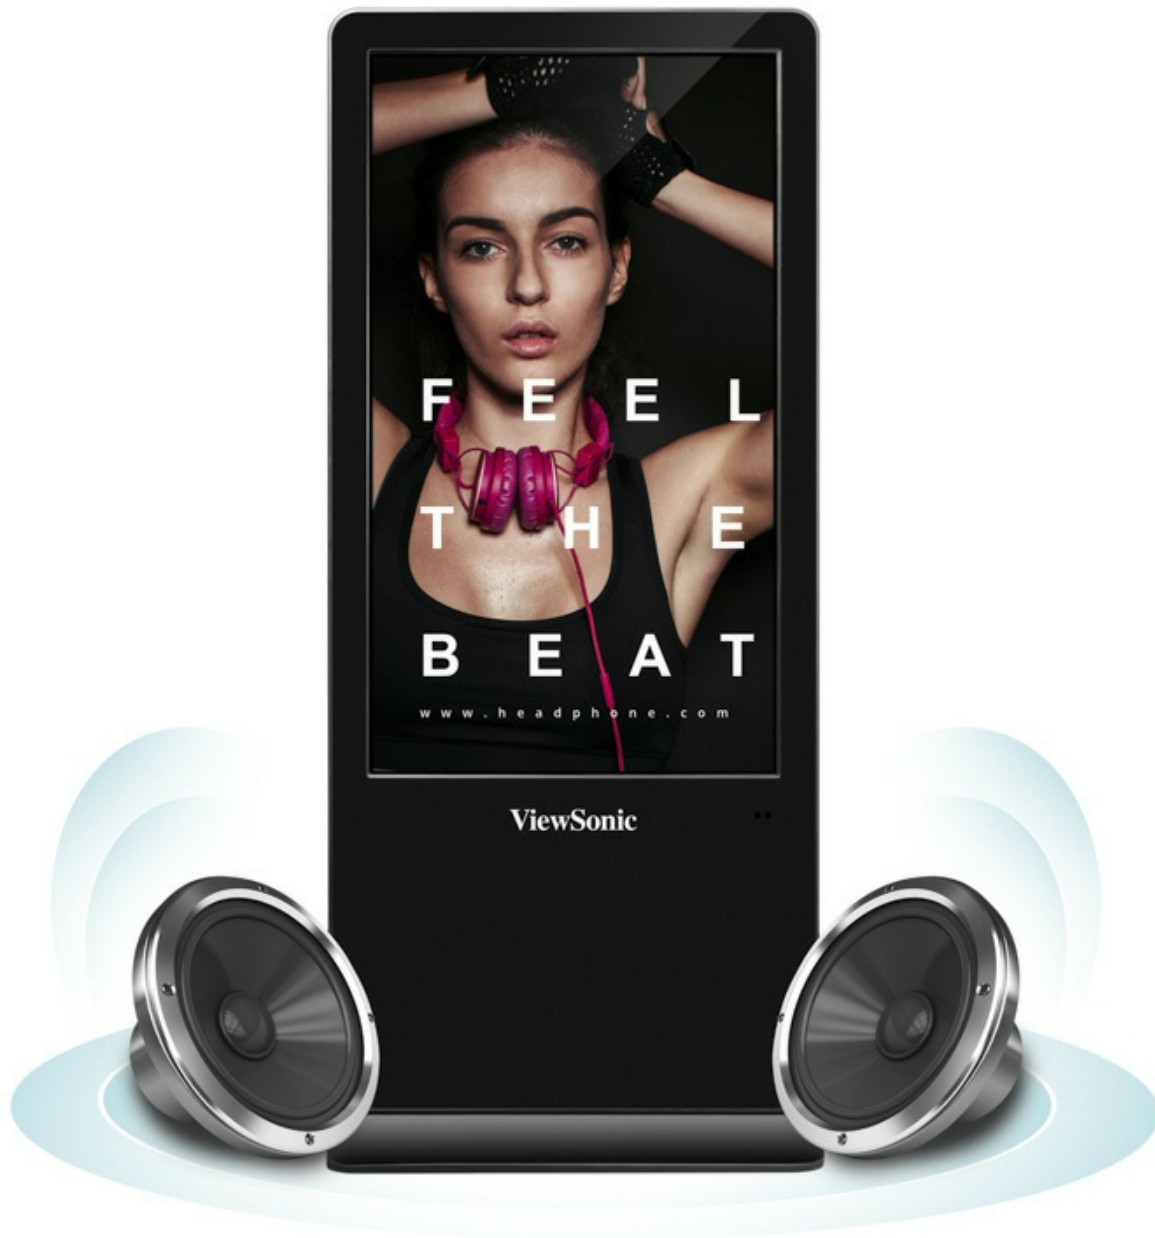

Signage Content Management

The intranet remote control vSignage software allows anyone with basic computer skills to create or modify content playback schedules quickly from any Windows PC or laptop. With a variety of layout templates over LAN, users can deliver the right message to the right audience at the right times.




Remote Display Management

The built-in vController™ software makes remote display management easier without needing to type in commands. By using an RS232 or RJ45 connection between a computer and digital signage, users can manage the signage's OSD settings such as On/Off, display signal source, audio, and other general items.



Remote Various Display Management

Compatible with professional ProAV control systems such as Crestron, AMX, Extron, and Control4, this ePoster allows IT personnel to manage and configure settings remotely over LAN with other display devices.

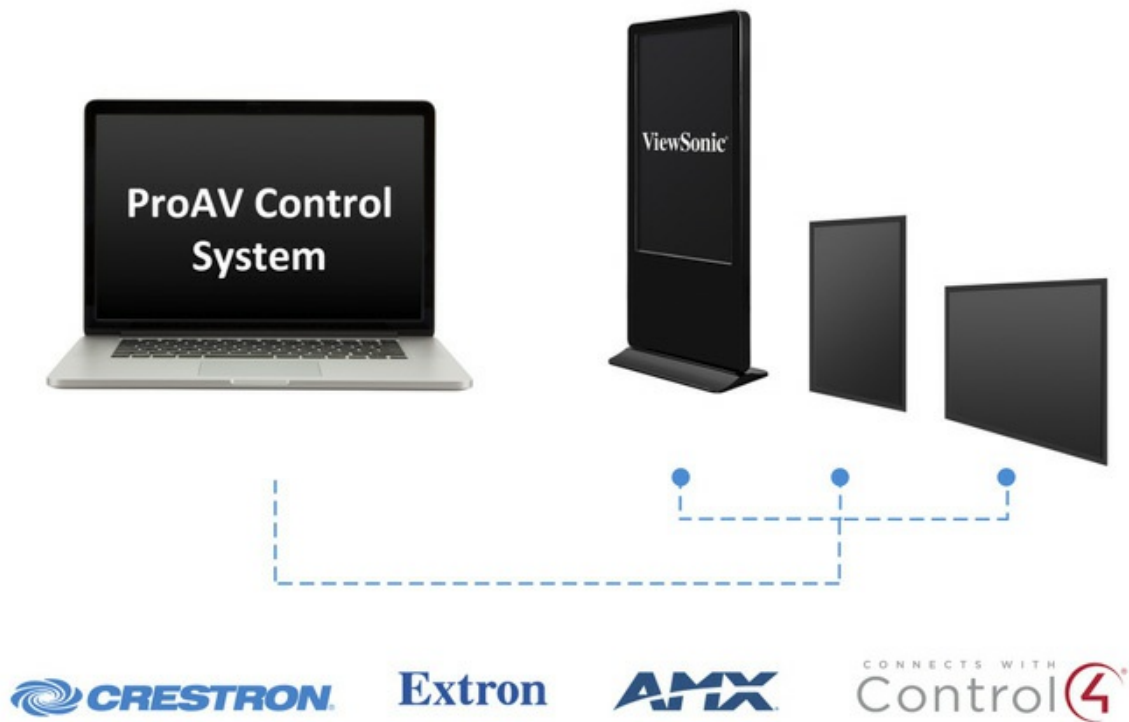

Media Player Cradle with Security Door

A convenient media player cradle can accommodate a PC or an additional mounted media player, while a lockable door keeps things secure and out of sight. The ePoster stand also features an integrated power supply, eliminating the need to find alternative outlets for add-on devices.




Robust and Reliable Design

This standing all-in-one digital ePoster kiosk features a sleek and slim premium design, utilising a 7H tempered glass faceplate that offers scratch-proof protection to keep your ePoster looking like new year after year.



I/O Ports

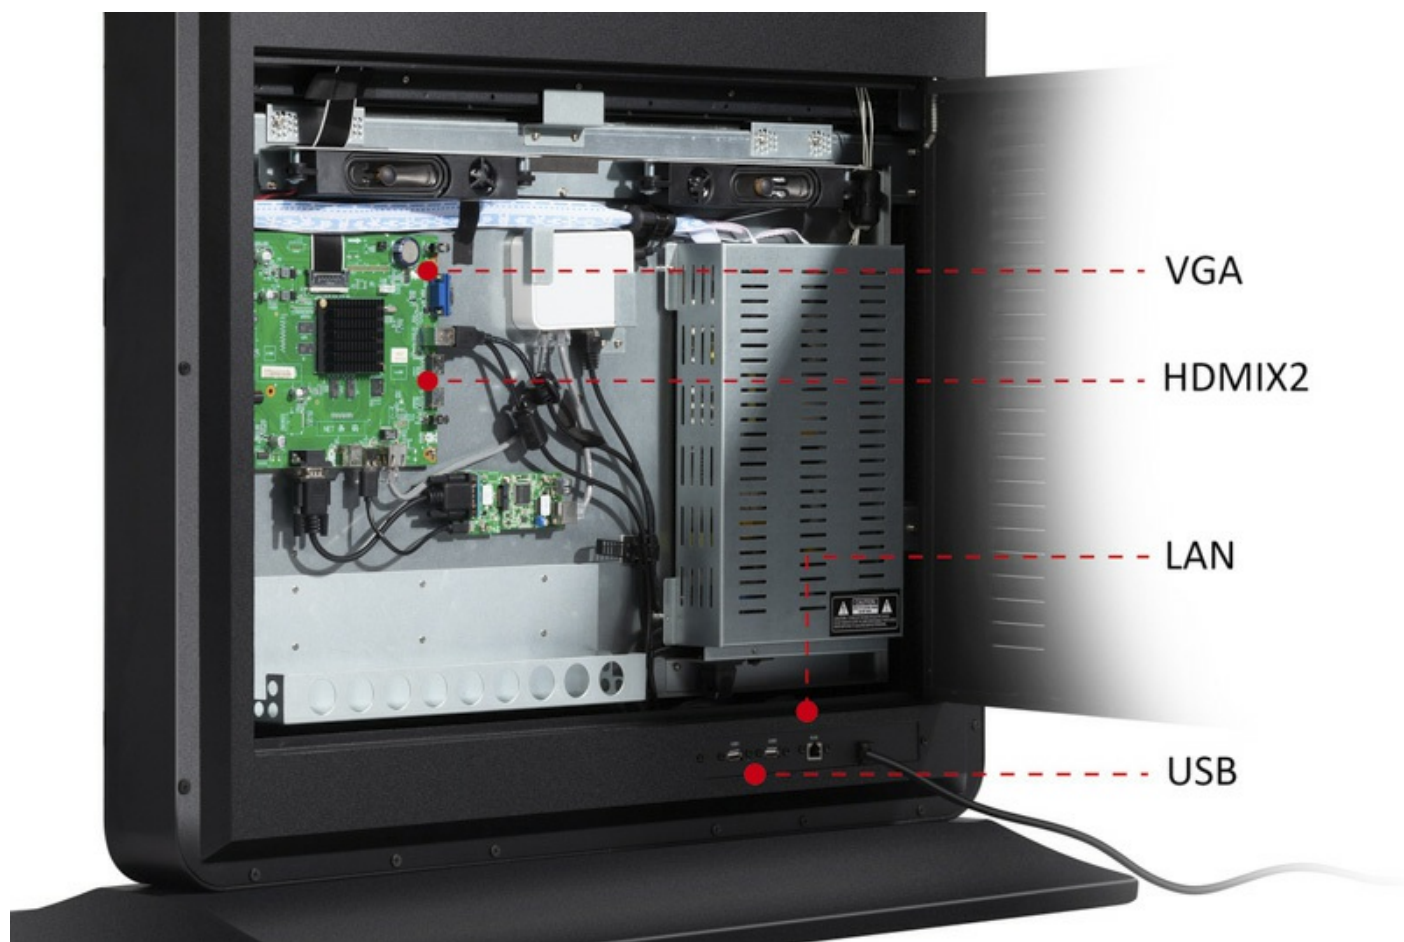

Dimension



Technical Specifications

Display	Panel Size	55"
	Type/Tech	TFT LCD (IPS type,DLED Backlight)
	Display Area (mm)	1209.6 (H) * 680.4 (V)
	Aspect Ratio	9:16
	Native Resolution	3840 x 2160
	Colors	1.07B

	Brightness	350 nits (typ.)
	Contrast Ratio	1200:1 (typ.)
	Response Time	9 ms (typ. G to G)
	Viewing Angles	H = 178, V = 178 typ.
	Backlight Life	30,000 Hours Typ.
	Surface Treatment	Anti-glare
	Orientation	Portrait
Touch	Type/ Tech	IR Recognition
	Touch Resolution	32768 x 32768
	Touch Point	10 Points
Storage		eMMC 16GB
INPUT	HDMI	(1.4) x2
	RGB / VGA	x1
	Audio	x1 PC audio(3.5 mm)
	RS232	x1
OUTPUT	Audio	x1 (Earphone out)
LAN	RJ45	x1
USB	Type A	x3 (2.0 x 1, 3.0 x 2)
	Type B	x1 (for touch module)
SPEAKERS		10W x 2
COMPATIBILITY	RGB PC/HDMI PC	1920x1080 @60Hz
	HDMI	2160 x 3840 @60Hz
Android Version		5.0.1
Multimedia		Image: JPG, BMP, PNG Video: AVI, MPG, MPEG, DAT, MP4, TS, RM, RMVB, MKV, MOV Audio: MP3, AAC
Bundle Software		vSignage
Power	Voltage	100-240VAC +/- 10% Wide Range
	Consumption	Normal 117 W, Max 150 W (max.) < 0.5W (Off)
OPERATING CONDITIONS	Temperature (° C)	0°C to 40°C
	Humidity	20% ~ 80% non-condensing
DIMENSIONS (W x H x D)	Physical (inch / mm)	32.28 x 74.8 x 17.71 in/820 x 1900 x 450 mm
	Packaging (inch / mm)	38.7 x 79.37 x 24.33 in/983 x 2016 x 618 mm
WEIGHT	Net (lb / kg)	154.32 lbs/70 kg
	Gross (lb / kg)	187.39 lbs/85 kg

REGULATIONScTUVus, FCC, BSMI

PACKAGE CONTENTS

1. Power Cord
2. Remote control with battery
3. Quick Start Guide
4. User Guide CD
5. Key

*Actual content may differ from market to market

ViewSonic® Limited Warranty

ViewSonic provides customers with the security of a manufacturers warranty against defected products. The type and duration of the applicable warranty service varies by product type, country of purchase and can also vary on an individual basis according to customer requirements agreed at time of purchase. The warranty will expire after the end of the warranty period.

For more product information, visit us at **www.viewsoniceurope.com**

All rights reserved by ViewSonic Corporation. All other Corporate names and trademarks are the property of their respective companies. E&EO. All prices and specifications are subject to change without written notice. Images are for illustrative purpose only. Terms & Conditions Apply.